

PARAMETER

Size	80mm(L)*50mm(W)*32mm(H)
Working Temperature	-25°C to 80°C
Working Voltage	3.7V

Weight

170g

Built-in Battery


6000mAh


HARDWARE SPECIFICATION

Location Accuracy	≤5m	Channel	56 Class
Frequency	4G/2G	GPS Sensitivity	-144dBm
Positioning Time	Hot Start<2SEC(Open Sky)	Tracking Sensitivity	-165dBm
	Warm Start<15SEC	Power LED Indicator	Red
	Cold Start<38SEC(Open Sky)	GPS LED Indicator	Blue
LTE Antenna	FPC antenna	LTE LED Indicator	Yellow
GPS Antenna	Built-in 25mm*25mm*2mm Ceramic Antenna		

SOFTWARE SPECIFICATION

Data Upgrade Port	Support	Geo-fence
Parameter Setting	SMS Command, Platform	Low Battery Alarm
Location Upload	Upload Interval Every 10 Seconds	Vibration Alarm
Third-party Checking	WEB/APP	Disassemble Alarm
Overspeed Alarm	Support	

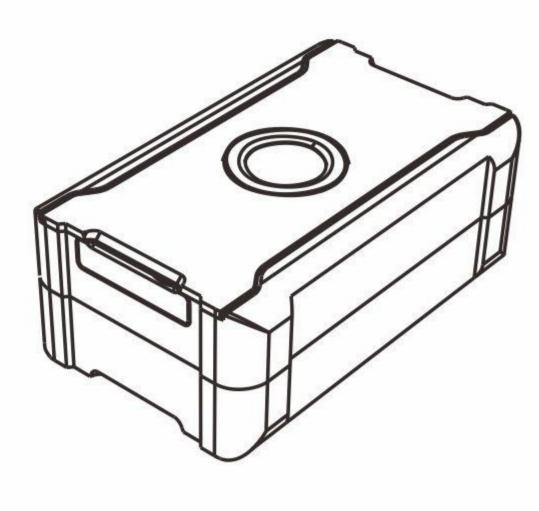

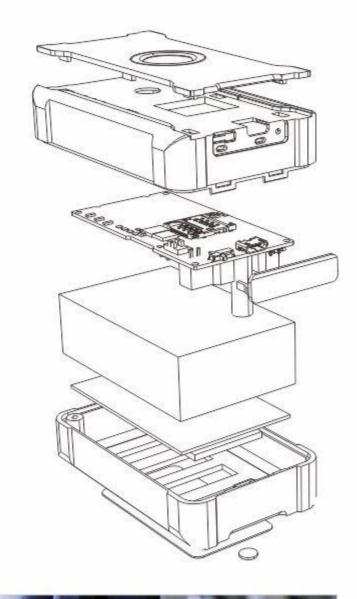

Support


Support

Support

Support

FUNCTION





Light Sensor and Disassemble Alarm





Remotely Voice Monitoring





APPLICATION



Container Tracking



Trailer Tracking



Luggage Tracking